



- ✤ FUNCTION: To connect pipes to pipes and pipes to flanges
- STRUCTURE Ductile iron, fusion bonded epoxy coating. Working pressure PN16, tapered rubber gasket

Brass sealing ring for HDPE pipe to prevent the pipe pull off.

- PARTS: Top cover and body are ductile iron FCD 450, gasket EPDM with brass sealing ring, botls and nuts are ductile iron/SUS 304/ steel gavernized 8.8.
- * **STANDARS:** ISO 2531 2009

TEE



TEE EEE (FFF)



TEE EBE (FFB)




ELBOW







REDUCER EE, BB

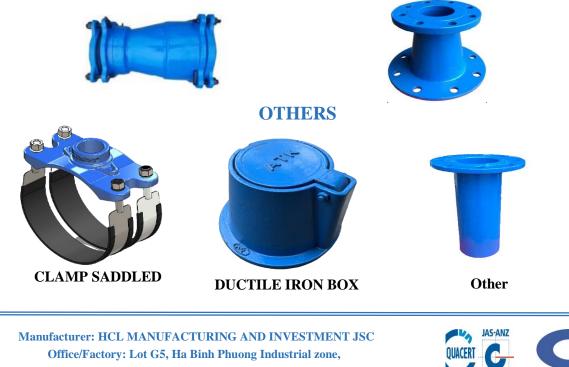

Thuong Tin district, Ha Noi, Vietnam Representative office: K48, F Street, KP4, Tan Thoi Hiep Ward, District 12, Ho Chi Minh http://www.hcl.vn; Hotline: 0367.608.608

